

# Text Indexing

## Lecture 09: Suffix Array Construction in Distributed and External Memory

Florian Kurpicz

The slides are licensed under a Creative Commons Attribution-ShareAlike 4.0 International License © ⓘ ⓘ: [www.creativecommons.org/licenses/by-sa/4.0](http://www.creativecommons.org/licenses/by-sa/4.0) | commit 224e27c compiled at 2023-01-09-13:20

# Recap: Suffix Array and LCP-Array

## Definition: Suffix Array [GBS92; MM93]

Given a text  $T$  of length  $n$ , the **suffix array** (SA) is a permutation of  $[1..n]$ , such that for  $i \leq j \in [1..n]$


$$T[SA[i]..n] \leq T[SA[j]..n]$$


## Definition: Longest Common Prefix Array

Given a text  $T$  of length  $n$  and its SA, the **LCP-array** is defined as

$$LCP[i] = \begin{cases} 0 & i = 1 \\ \max\{\ell: T[SA[i]..SA[i] + \ell) = \\ T[SA[i - 1]..SA[i - 1] + \ell)\} & i \neq 1 \end{cases}$$


	1	2	3	4	5	6	7	8	9	10	11	12	13
$T$	a	b	a	b	c	a	b	c	a	b	b	a	\$
SA	13	12	1	9	6	3	11	2	10	7	4	8	5
LCP	0	0	1	2	2	5	0	2	1	1	4	0	3

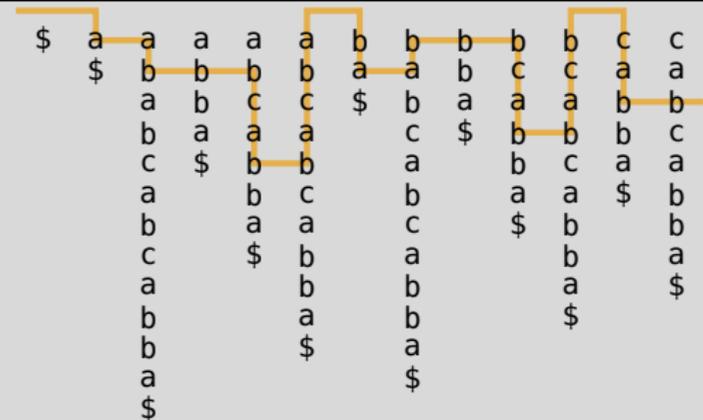

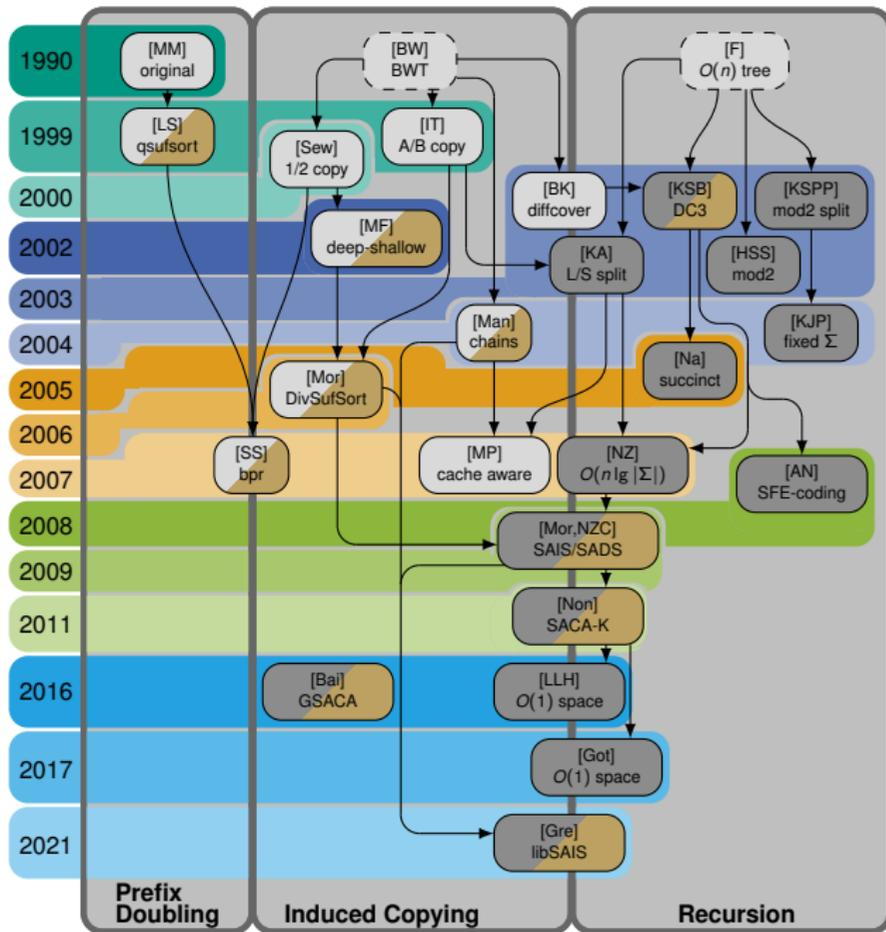

## Timeline Sequential Suffix Sorting

- based on [Bah+19; Bin18; Kur20; PST07]
- darker grey: linear running time
- brown: available implementation

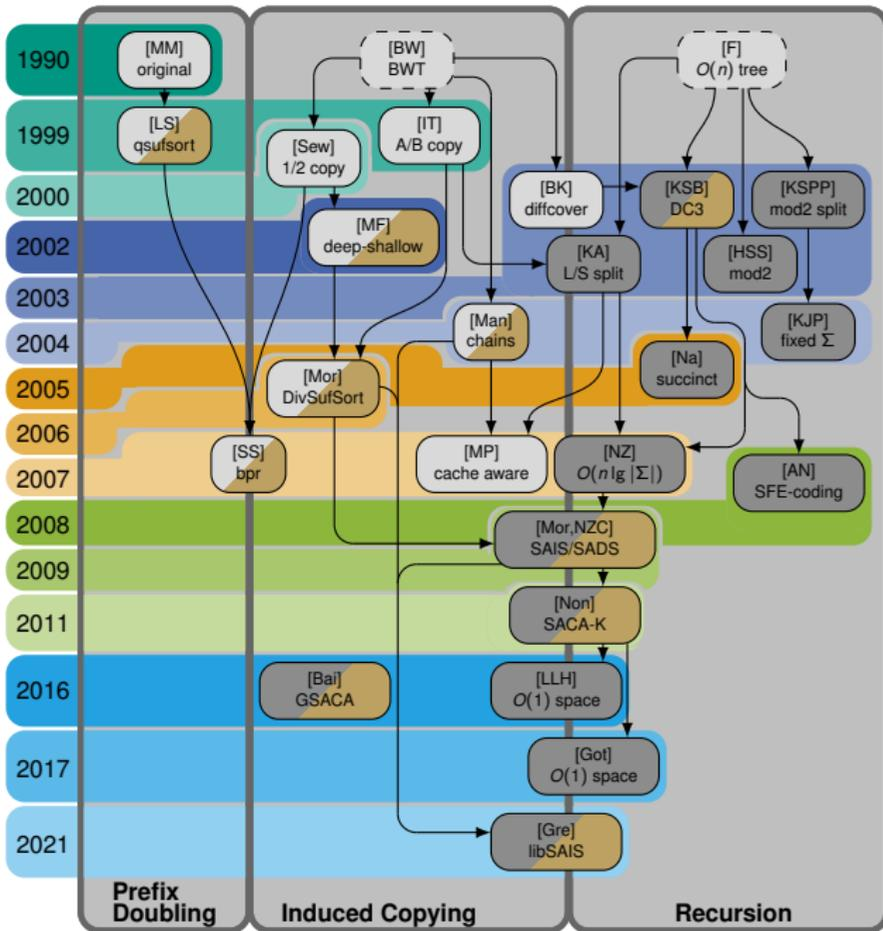


## Timeline Sequential Suffix Sorting

- based on [Bah+19; Bin18; Kur20; PST07]
- darker grey: linear running time
- brown: available implementation

## Special Mentions

- DC3 first  $O(n)$  algorithm
- $O(n)$  running time and  $O(1)$  space for integer alphabets possible

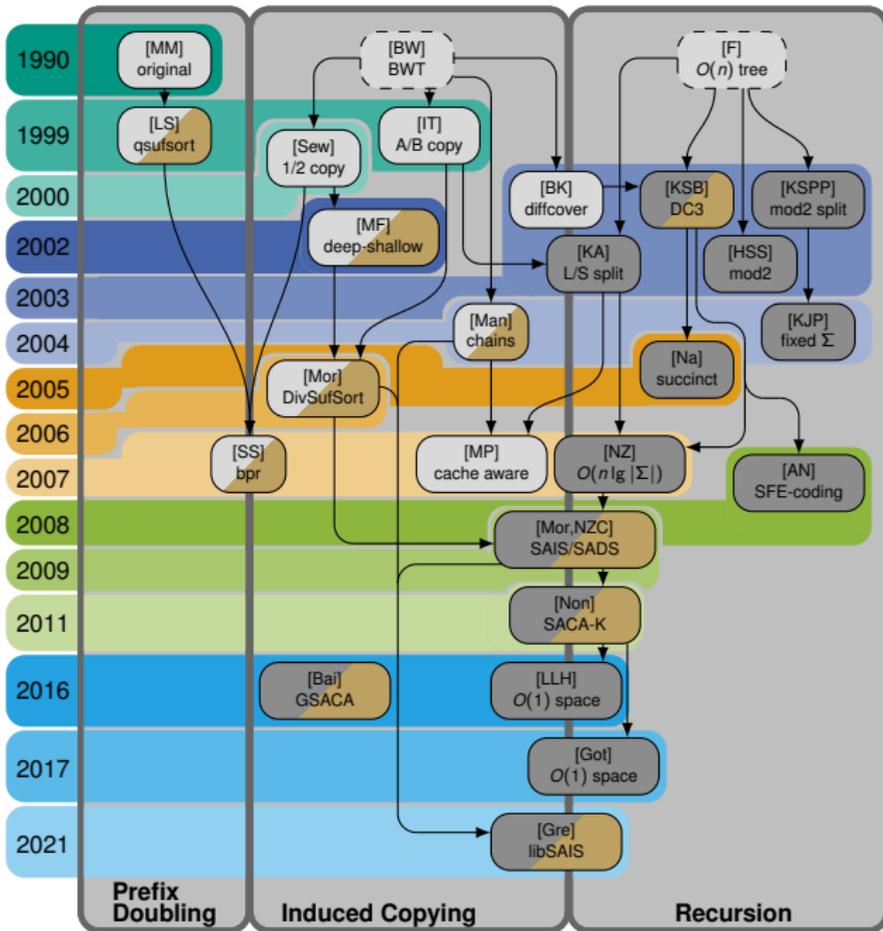


## Timeline Sequential Suffix Sorting

- based on [Bah+19; Bin18; Kur20; PST07]
- darker grey: linear running time
- brown: available implementation

## Special Mentions

- DC3 first  $O(n)$  algorithm
- $O(n)$  running time and  $O(1)$  space for integer alphabets possible
- until 2021: DivSufSort fastest in practice with  $O(n \lg n)$  running time

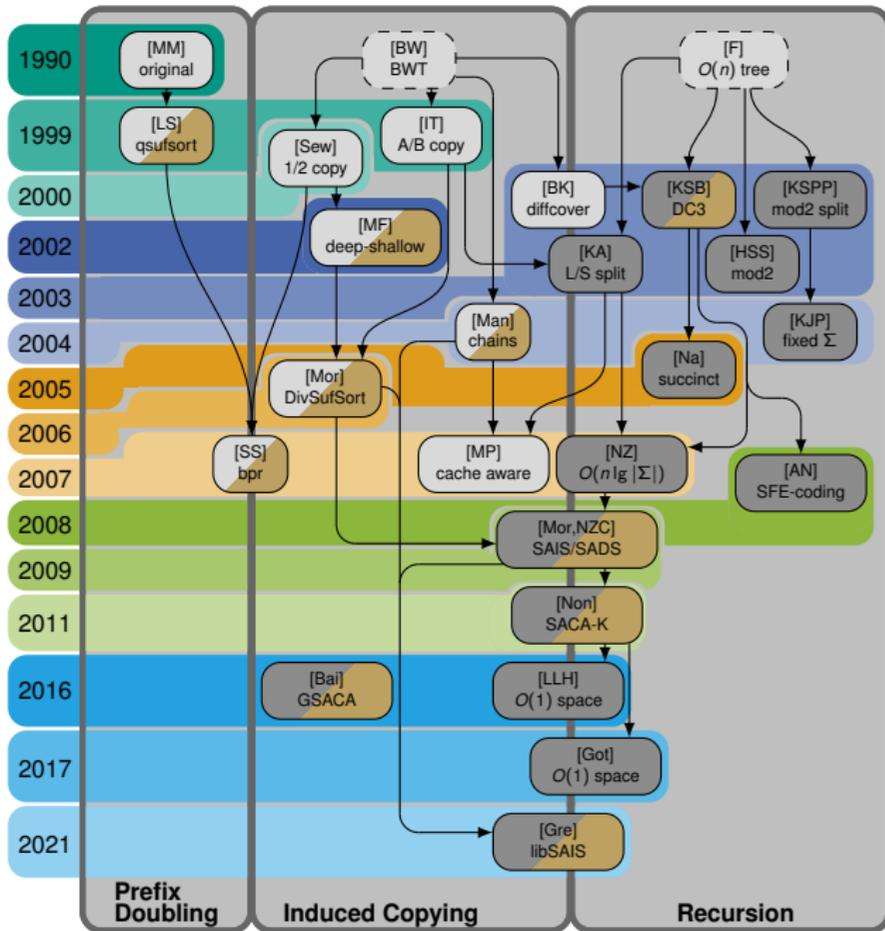

## Timeline Sequential Suffix Sorting

- based on [Bah+19; Bin18; Kur20; PST07]
- darker grey: linear running time
- brown: available implementation


## Special Mentions

- DC3 first  $O(n)$  algorithm
- $O(n)$  running time and  $O(1)$  space for integer alphabets possible
- until 2021: DivSufSort fastest in practice with  $O(n \lg n)$  running time
- since 2021: libSAIS fastest in practice with  $O(n)$  running time

# External and Distributed Memory

## External Memory

- internal memory of size  $M$  words
- external memory of unlimited size
- transfer of blocks of size  $B$  words



- scanning  $N$  elements:  $\Theta\left(\frac{N}{B}\right)$
- sorting  $N$  elements:  $\Theta\left(\frac{N}{B} \lg_{\frac{M}{B}} \frac{N}{B}\right)$


- semi-external memory



# External and Distributed Memory

## External Memory

- internal memory of size  $M$  words
- external memory of unlimited size
- transfer of blocks of size  $B$  words




- scanning  $N$  elements:  $\Theta(\frac{N}{B})$
- sorting  $N$  elements:  $\Theta(\frac{N}{B} \lg_{\frac{M}{B}} \frac{N}{B})$

- semi-external memory





## Distributed Memory

- $p$  PEs with internal memory
- communication between PEs over network

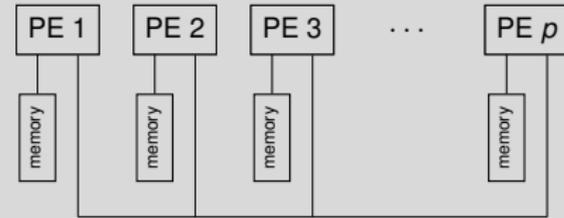

- bulk-synchronous parallel model [Val90]
- supersteps: local work, communication, synchronization


# Challenges for Suffix Array Construction

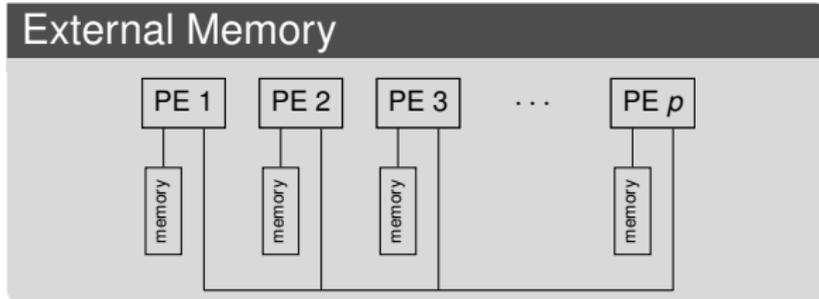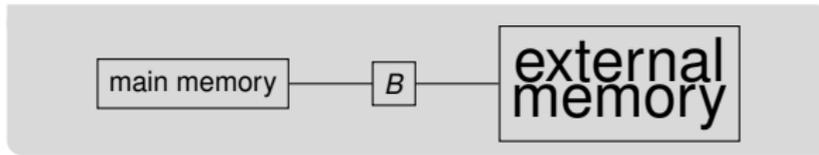


## Distributed Memory

- suffixes span over whole input ⓘ no locality
- comparing suffixes requires text access
  - ⓘ random access

# Challenges for Suffix Array Construction





## External Memory

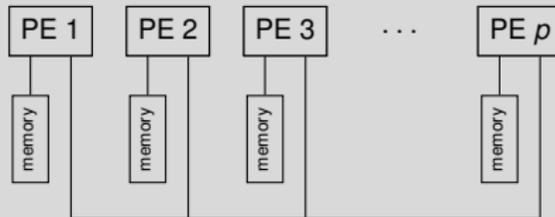

## Distributed Memory



- suffixes span over whole input ⓘ no locality
- comparing suffixes requires text access
  - ⓘ random access
- random access expensive in both models
- whole suffix not available locally in distributed memory



# Challenges for Suffix Array Construction

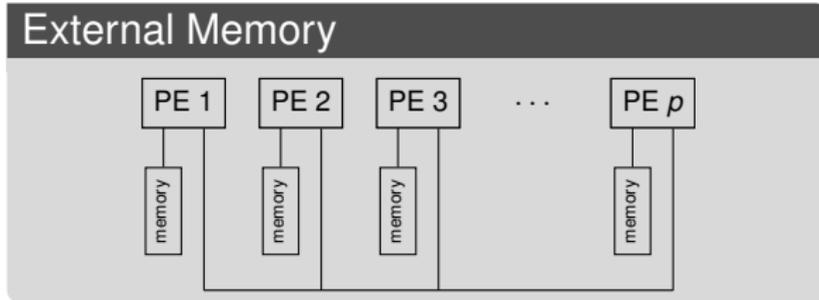
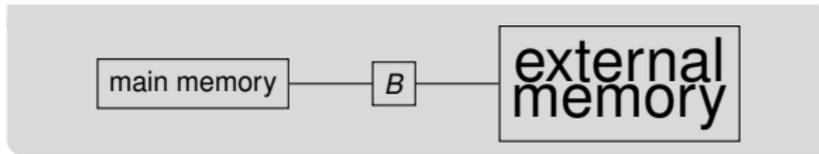


## Distributed Memory

- suffixes span over whole input ⓘ no locality
- comparing suffixes requires text access
  - ⓘ random access
- random access expensive in both models
- whole suffix not available locally in distributed memory
- express suffix array construction algorithm using
  - scanning
  - sorting
  - merging

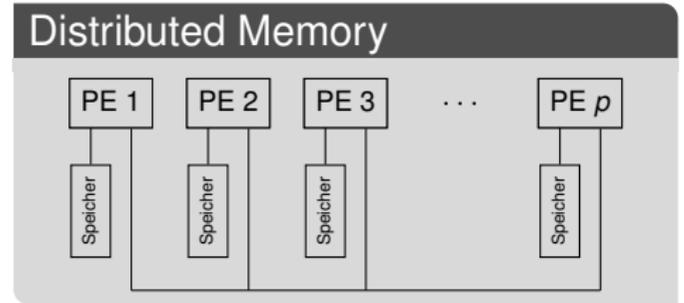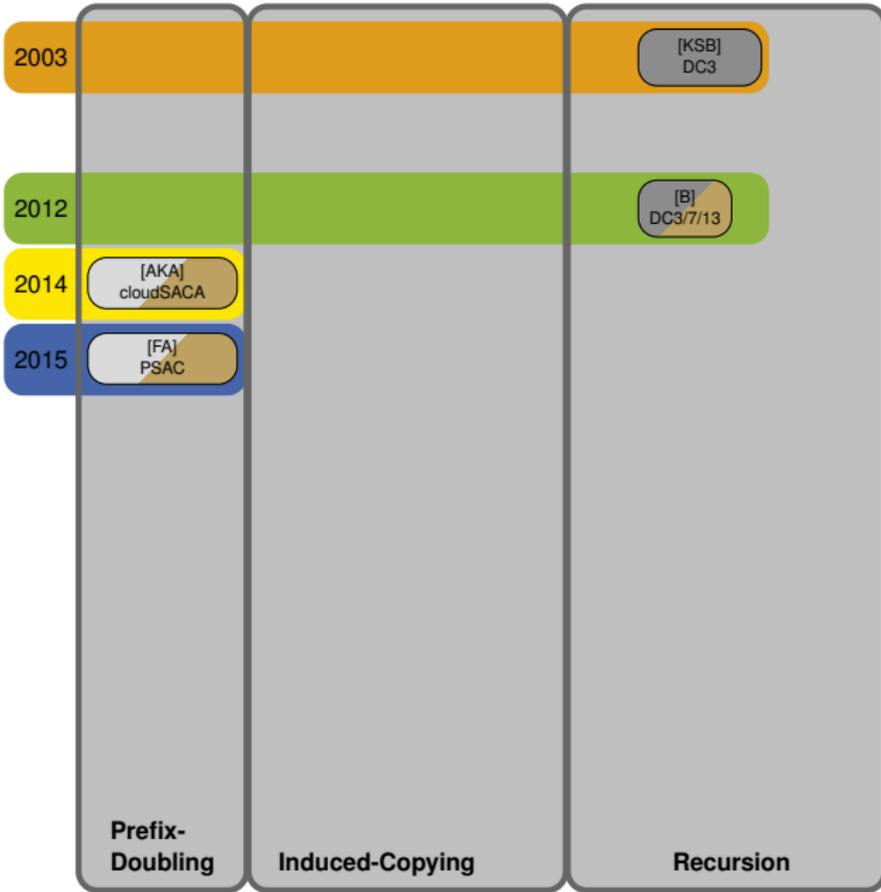

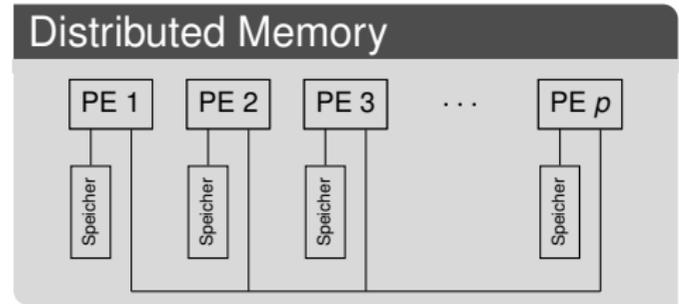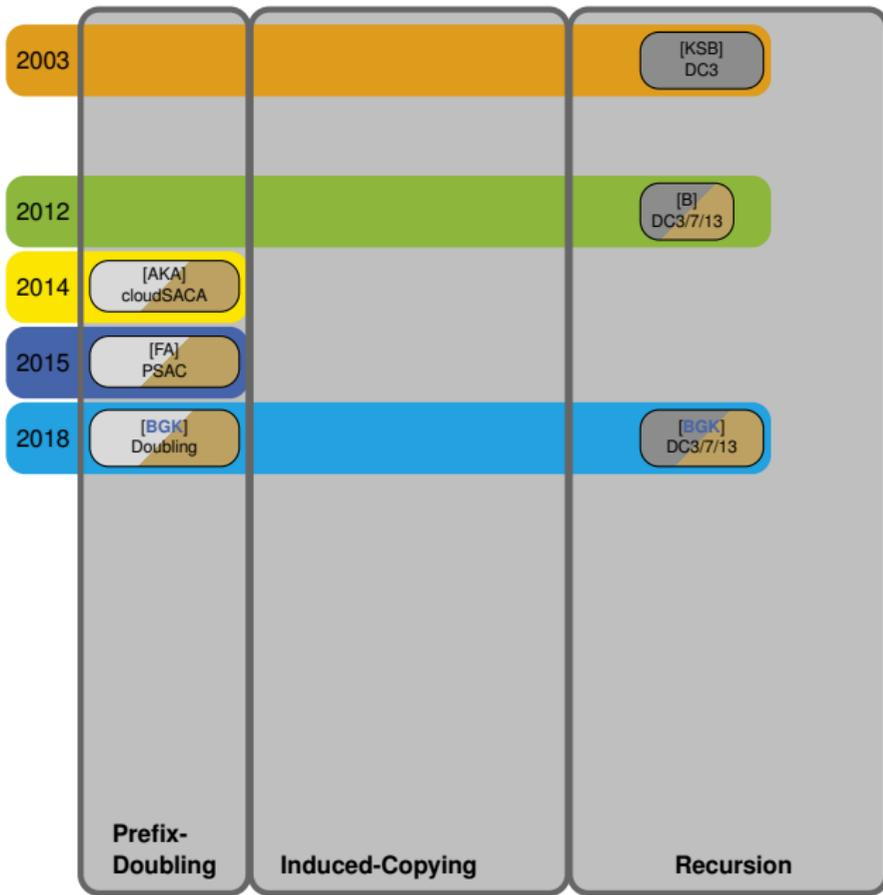

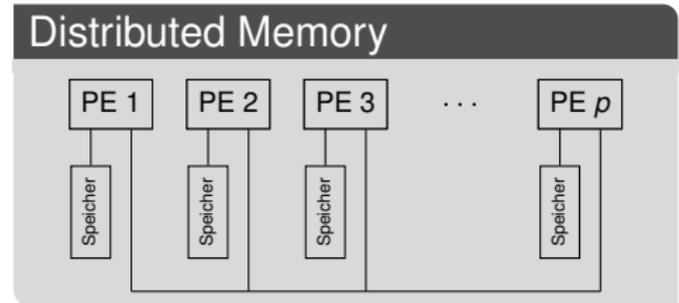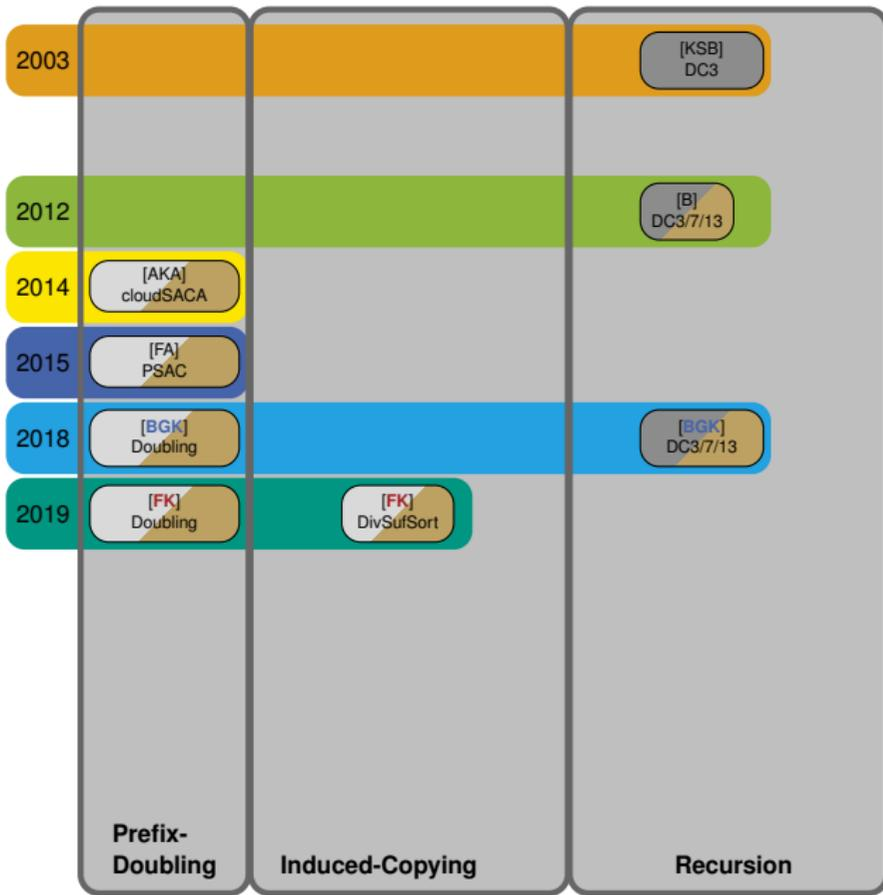

# $h$ -Order, $h$ -Groups, and $h$ -Ranks

## Definition: $h$ -Order

- $h$ -Order:

$$T[i..n] \leq_h T[j..n] \iff T[i..i+h) \leq T[j..j+h)$$

- $SA_h$  is the suffix array of all suffixes ordered by  $h$ -order ⓘ not unambiguously

# $h$ -Order, $h$ -Groups, and $h$ -Ranks

## Definition: $h$ -Order

- $h$ -Order:

$$T[i..n] \leq_h T[j..n] \iff T[i..i+h) \leq T[j..j+h)$$

- $SA_h$  is the suffix array of all suffixes ordered by  $h$ -order ⓘ not unambiguously

## Definition: $h$ -Ranks und $h$ -Groups

- all suffixes that are equal w.r.t. an  $h$ -order are in an  $h$ -group
- $h$ -rank: number of lexicographically smaller  $h$ -groups plus one


# $h$ -Order, $h$ -Groups, and $h$ -Ranks

## Definition: $h$ -Order

- **$h$ -Order:**  
 $T[i..n] \leq_h T[j..n] \iff T[i..i+h] \leq T[j..j+h]$
- $SA_h$  is the suffix array of all suffixes ordered by  $h$ -order **not unambiguously**

## Definition: $h$ -Ranks und $h$ -Groups

- all suffixes that are equal w.r.t. an  $h$ -order are in an  **$h$ -group**
- **$h$ -rank:** number of lexicographically smaller  $h$ -groups plus one

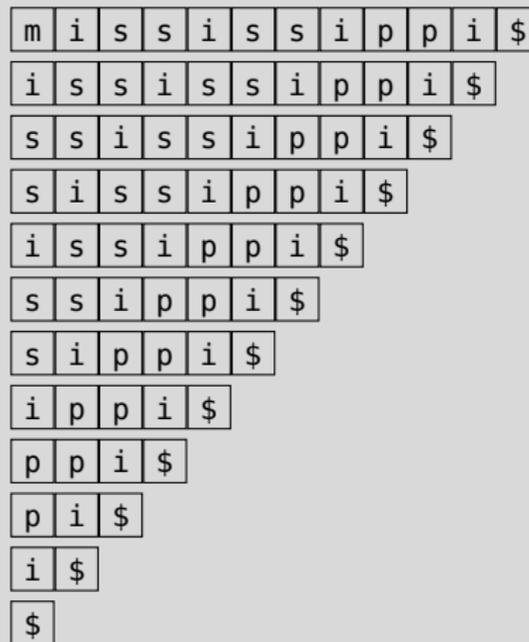


# $h$ -Order, $h$ -Groups, and $h$ -Ranks

## Definition: $h$ -Order

- $h$ -Order:**  
 $T[i..n] \leq_h T[j..n] \iff T[i..i+h] \leq T[j..j+h]$
- $SA_h$  is the suffix array of all suffixes ordered by  $h$ -order **not unambiguously**

## Definition: $h$ -Ranks und $h$ -Groups

- all suffixes that are equal w.r.t. an  $h$ -order are in an  **$h$ -group**
- $h$ -rank:** number of lexicographically smaller  $h$ -groups plus one

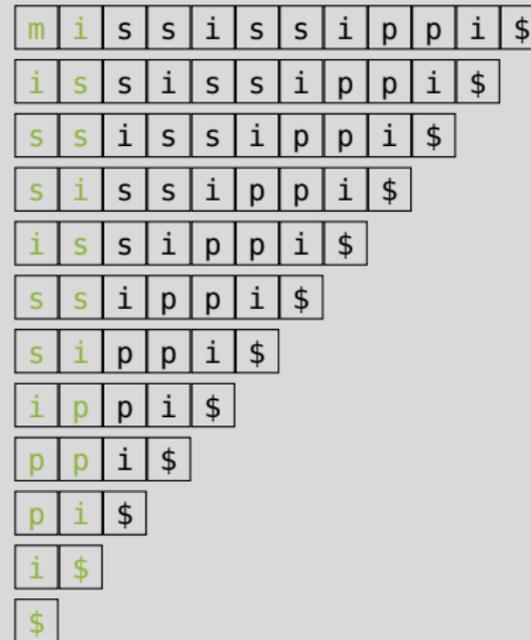


# $h$ -Order, $h$ -Groups, and $h$ -Ranks

## Definition: $h$ -Order

- **$h$ -Order:**  
 $T[i..n] \leq_h T[j..n] \iff T[i..i+h] \leq T[j..j+h]$
- $SA_h$  is the suffix array of all suffixes ordered by  $h$ -order **not unambiguously**

## Definition: $h$ -Ranks und $h$ -Groups

- all suffixes that are equal w.r.t. an  $h$ -order are in an  **$h$ -group**
- **$h$ -rank:** number of lexicographically smaller  $h$ -groups plus one

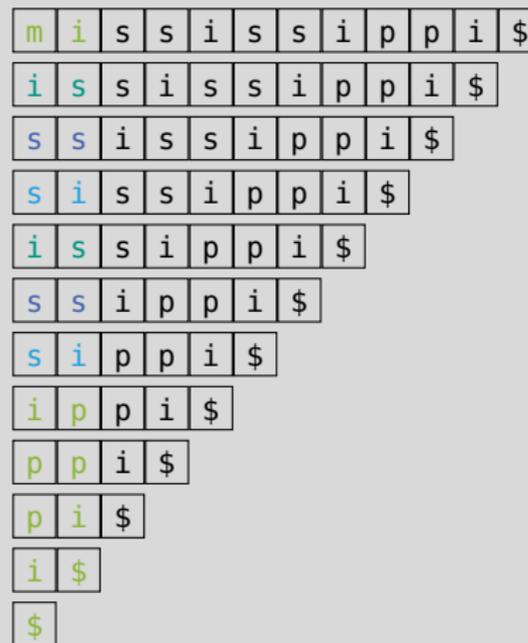

# Prefix-Doubling: The Idea

- 1-rank is the first character

# Prefix-Doubling: The Idea

- 1-rank is the first character
- 2-rank can be computed from first 2 characters

# Prefix-Doubling: The Idea

- 1-rank is the first character
- 2-rank can be computed from first 2 characters
- 3-rank can be computed from first 3 characters

# Prefix-Doubling: The Idea

- 1-rank is the first character
- 2-rank can be computed from first 2 characters
- 3-rank can be computed from first 3 characters
- 4-rank can be computed from first 4 characters

# Prefix-Doubling: The Idea

- 1-rank is the first character
- 2-rank can be computed from first 2 characters
- 3-rank can be computed from first 3 characters
- 4-rank can be computed from first 4 characters
- 4-rank can be computed from two 2-ranks


# Prefix-Doubling: The Idea

- 1-rank is the first character
  - 2-rank can be computed from first 2 characters
  - 3-rank can be computed from first 3 characters
  - 4-rank can be computed from first 4 characters
  - 4-rank can be computed from two 2-ranks
- 
- compute  $2^{k+1}$ -ranks using  $2^k$ -ranks

# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on
 

$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$
4. if all ranks are unique, break
5. compute SA from ISA

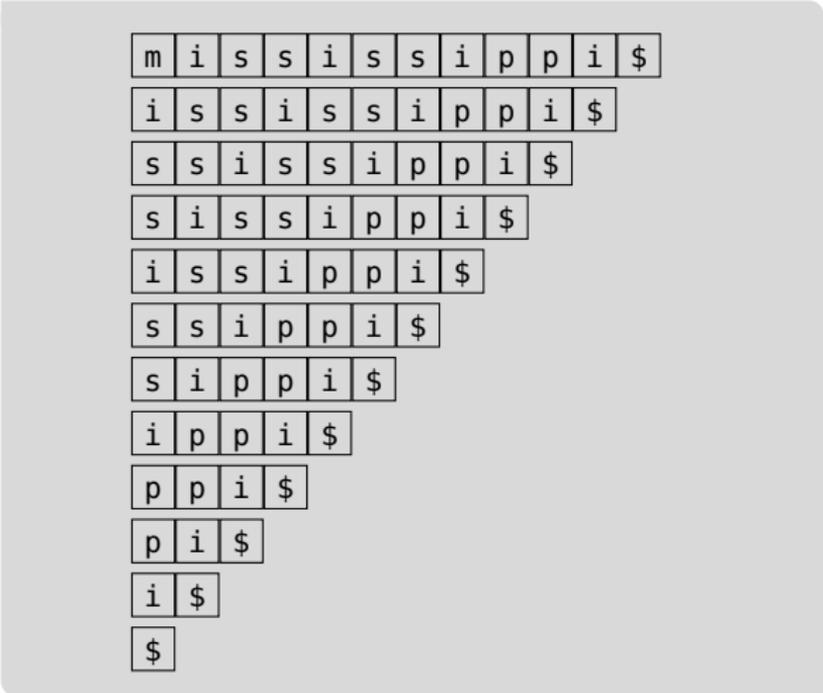

# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA




# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

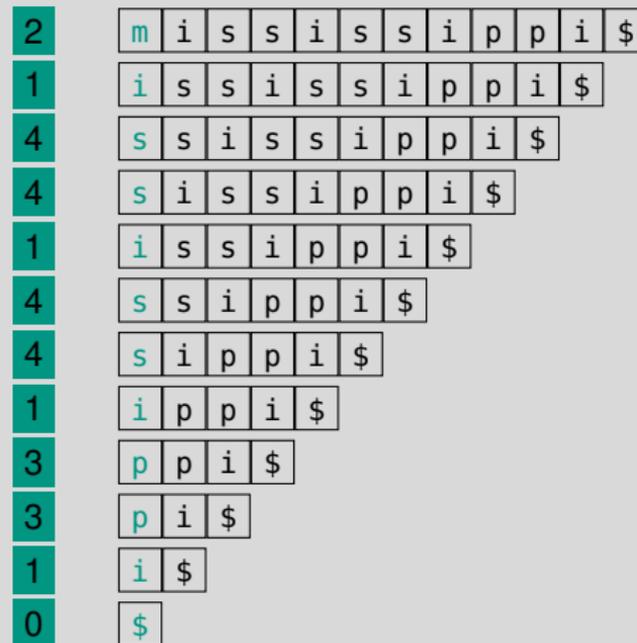


# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

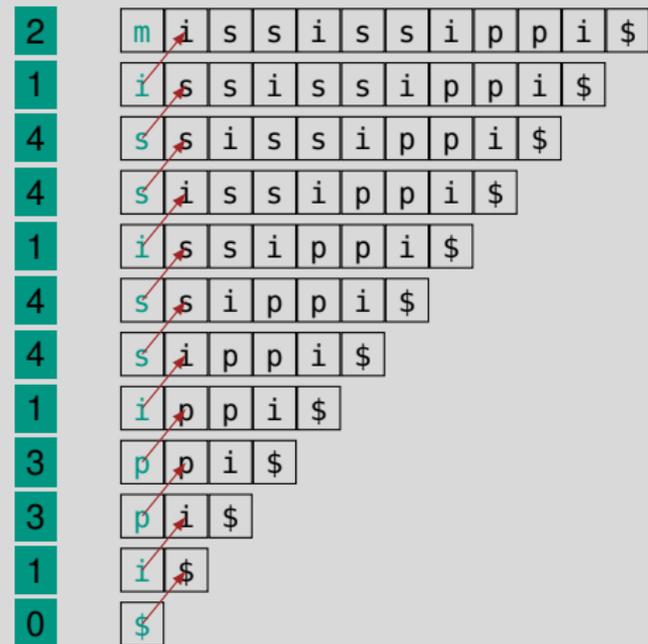


# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

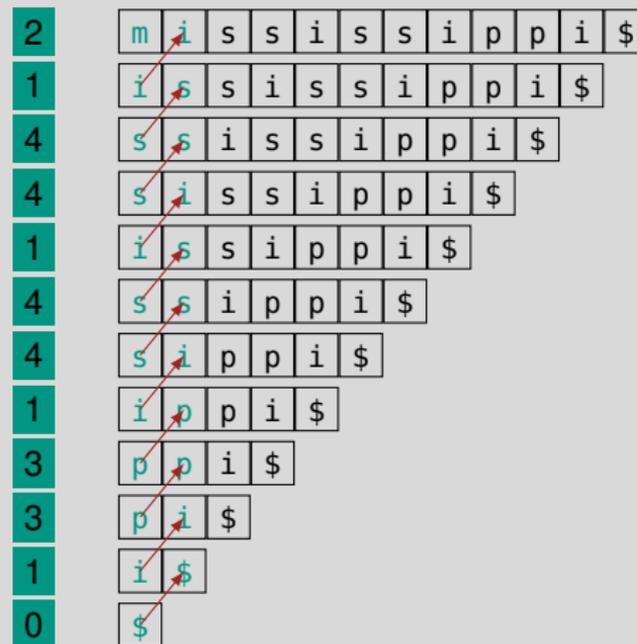


# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

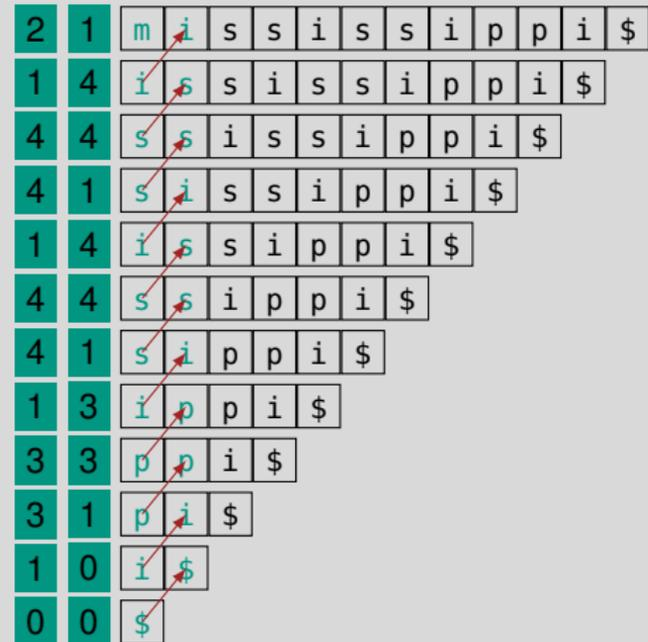


# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

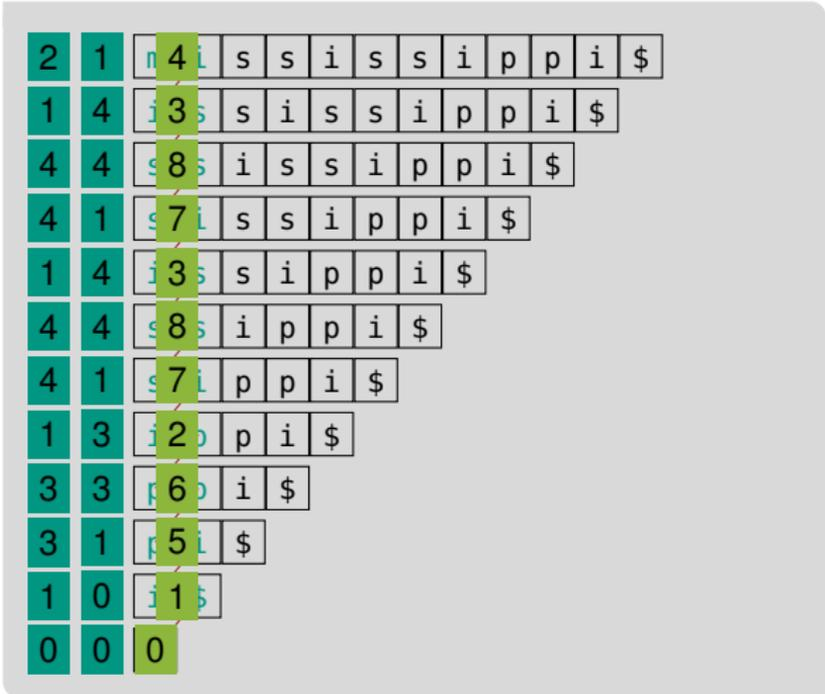


# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

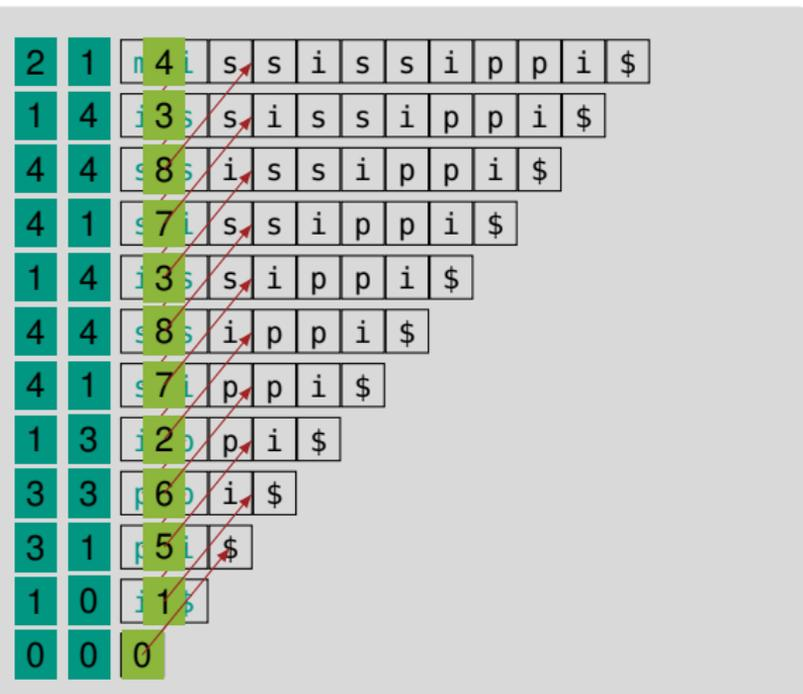

# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA



# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$


4. if all ranks are unique, break
5. compute SA from ISA



# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on
 

$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$
4. if all ranks are unique, break
5. compute SA from ISA

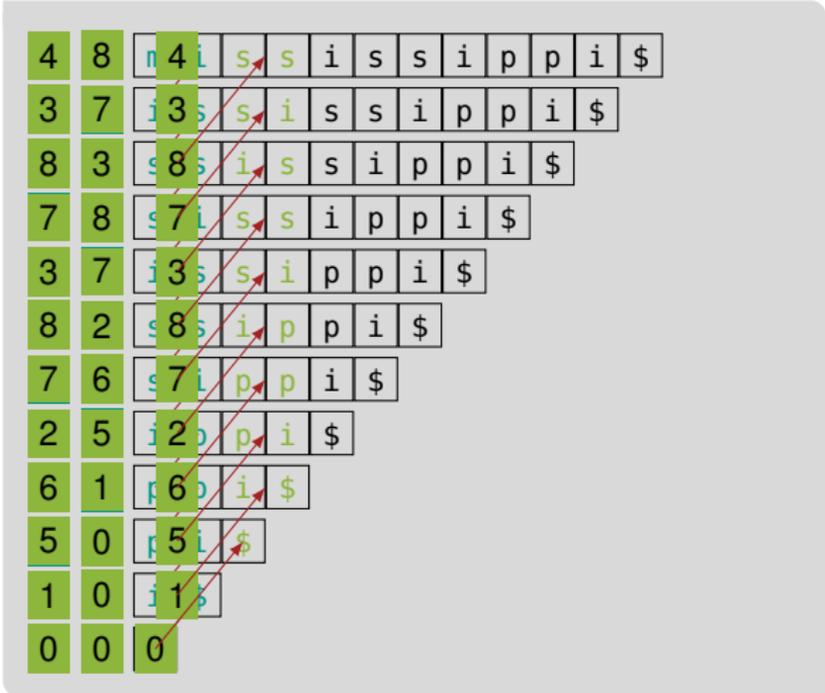

# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$


4. if all ranks are unique, break
5. compute SA from ISA



# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on
 

$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$
4. if all ranks are unique, break
5. compute SA from ISA

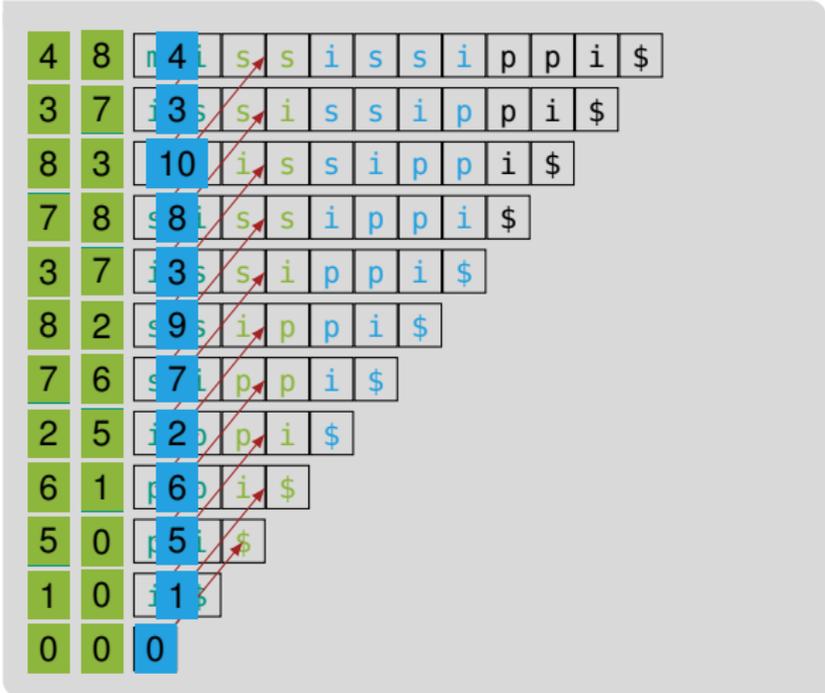

# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA




# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

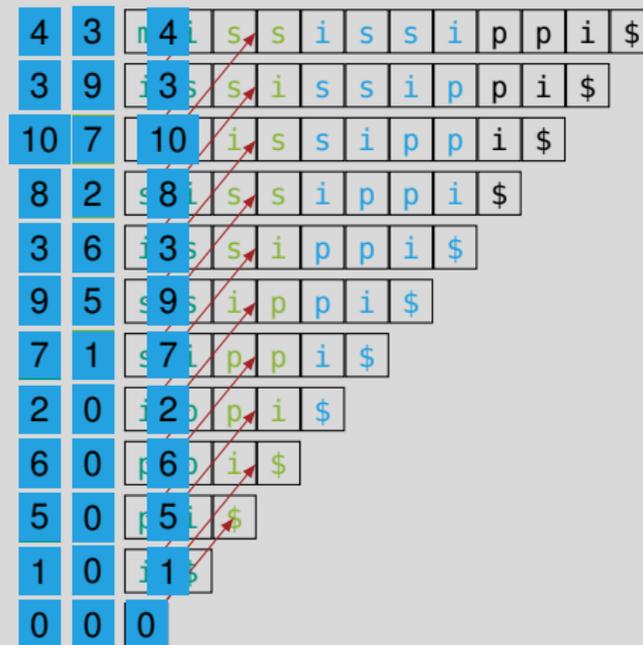


# Prefix-Doubling: Example

1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

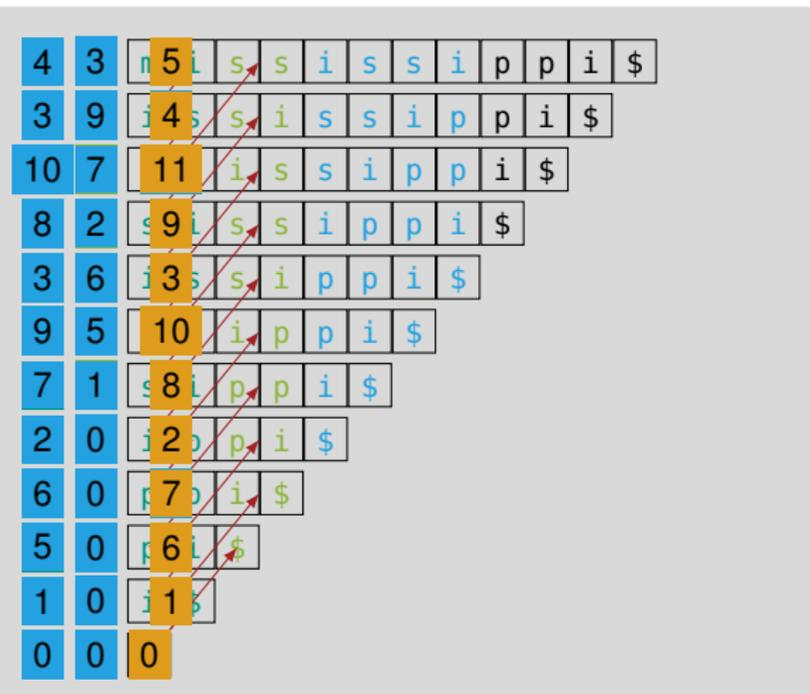

# Prefix-Doubling: Example


1. initial rank is  $T[i]$  1-rank
2. for  $k = 0$  to  $\lceil \lg n \rceil$
3. new  $2^{k+1}$ -ranks based on

$$ISA_{2^k}[i] \ \& \ ISA_{2^k}[i + 2^k]$$

4. if all ranks are unique, break
5. compute SA from ISA

## Simple Algorithm

- N. Jesper Larsson and Kunihiko Sadakane. "Faster Suffix Sorting". In: *Theor. Comput. Sci.* 387.3 (2007), pages 258–272. DOI: 10.1016/j.tcs.2007.07.017

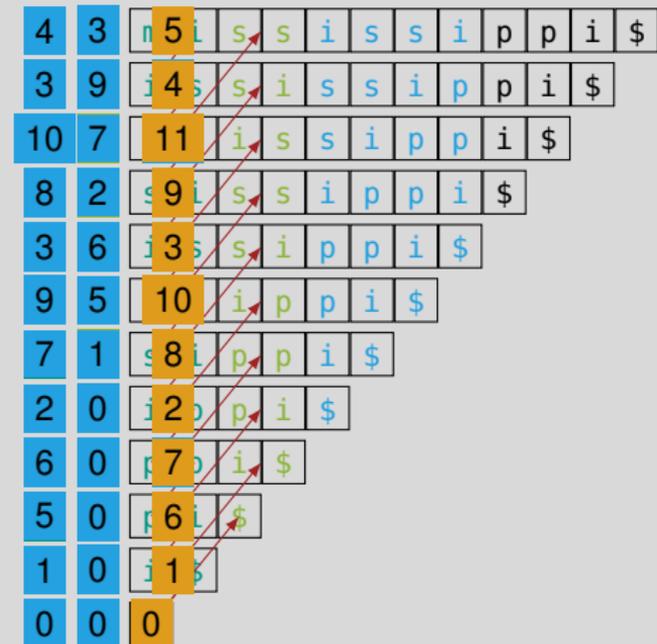

# Prefix-Doubling: Practical Approaches

## Use $ISA_h$ [FA15]

- use  $ISA_{2^k}$  to compute rank tuples
- for position  $i$  use rank  $ISA_{2^k}[i + 2^k]$
- if  $i + 2^k > n$ , second rank is 0
- example on the board 

# Prefix-Doubling: Practical Approaches

## Use $ISA_h$ [FA15]

- use  $ISA_{2^k}$  to compute rank tuples
- for position  $i$  use rank  $ISA_{2^k}[i + 2^k]$
- if  $i + 2^k > n$ , second rank is 0
- example on the board 

## Sort by Text Positions [Dem+08; FK19]

- especially good if access to  $ISA_h$  is expensive
- sort tuples (Textposition  $i$ , Rang  $r$ )
- using  $(i, r) \leq (j, r')$  iff

$$(i \bmod 2^k, \lfloor i/2^k \rfloor) < (j \bmod 2^k, \lfloor j/2^k \rfloor)$$

- example on the board 

# Prefix-Doubling: Running Time

- running time:  $O(n \lg n)$
- memory requirements:  $8n(+n)$  words  $\text{Ⓢ}$  for texts  $\leq 4 \text{ GiB}$
- worst-case input:  $T = a^{n-1}\$$



# Prefix-Doubling: Running Time

- running time:  $O(n \lg n)$
- memory requirements:  $8n(+n)$  words ⓘ for texts  $\leq 4$  GiB
- worst-case input:  $T = a^{n-1}$ §

## Generalization

- more than doubling is possible
- compute  $a^{k+1}$ -ranks using  $\alpha$   $a^k$ -ranks
- can save I/Os in EM ⓘ  $\alpha = 4$  requires 30 % less I/Os than  $\alpha = 2$  [Dem+08]

# Prefix Doubling: Experimental Results [Kur20]

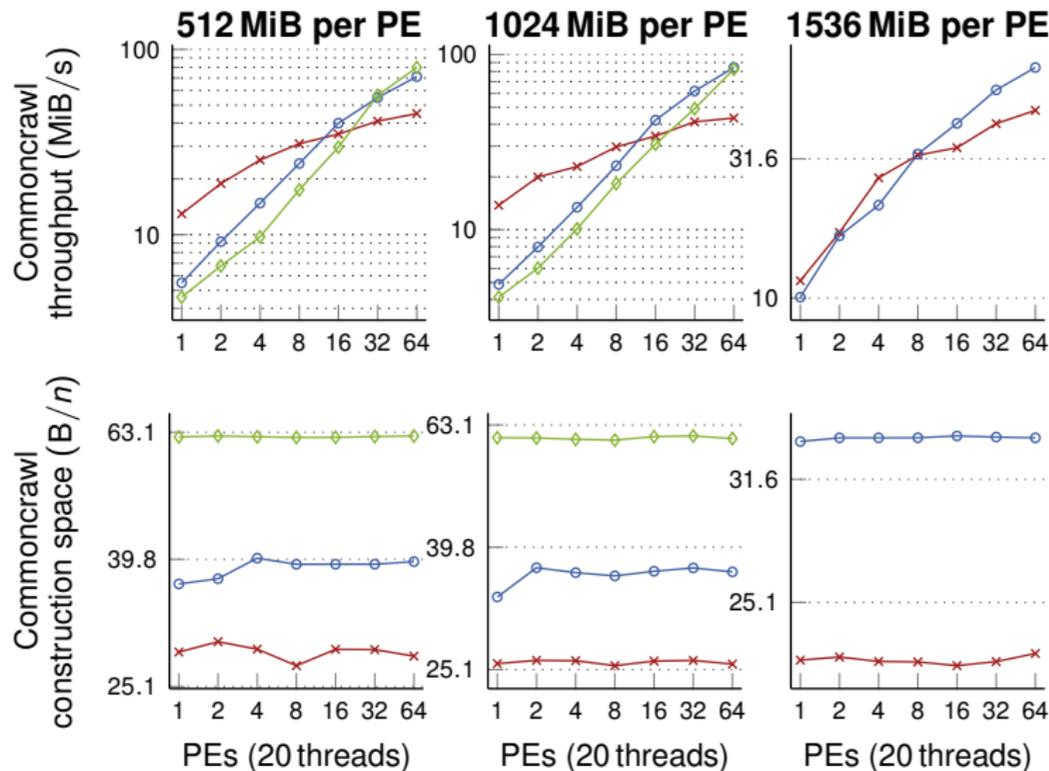

## Recap: SAIS

### The Idea: Inducing

Given a text  $T$  of length  $n$  and two positions  $i, j \in [1..n]$  with  $T[i] = T[j]$ , then

$$T[i..n] < T[j..n] \iff T[i + 1..n] < T[j + 1..n]$$

## Recap: SAIS

### The Idea: Inducing

Given a text  $T$  of length  $n$  and two positions  $i, j \in [1..n]$  with  $T[i] = T[j]$ , then

$$T[i..n] < T[j..n] \iff T[i + 1..n] < T[j + 1..n]$$

a	$\alpha$
---	----------

a	$\beta$
---	---------

## Recap: SAIS

### The Idea: Inducing

Given a text  $T$  of length  $n$  and two positions  $i, j \in [1..n]$  with  $T[i] = T[j]$ , then

$$T[i..n] < T[j..n] \iff T[i + 1..n] < T[j + 1..n]$$

a  $\alpha$

a  $\beta$

### The Algorithm: SAIS

- using inducing for everything
- described in [NZC11]

# Recap: SAIS

## The Idea: Inducing

Given a text  $T$  of length  $n$  and two positions  $i, j \in [1..n]$  with  $T[i] = T[j]$ , then

$$T[i..n] < T[j..n] \iff T[i + 1..n] < T[j + 1..n]$$

a α

a β

## The Algorithm: SAIS

- using inducing for everything
- described in [NZC11]

## Suffix Array Construction in 3 Phases

- classification
- sort special substrings/suffixes recursively
- induce all non-sorted suffixes

# Recap: SAIS

## The Idea: Inducing

Given a text  $T$  of length  $n$  and two positions  $i, j \in [1..n]$  with  $T[i] = T[j]$ , then

$$T[i..n] < T[j..n] \iff T[i + 1..n] < T[j + 1..n]$$

a   α  

a   β  

## The Algorithm: SAIS

- using inducing for everything
- described in [NZC11]

## Suffix Array Construction in 3 Phases

- classification
  - sort special substrings/suffixes recursively
  - induce all non-sorted suffixes
- 
- classification helps identifying special suffixes
  - everything in linear time

# SAIS in External Memory [BFO16; Kär+17]

## Classification

- simple scan of the text
- works well in external memory

- separate text during classification
- blockwise preinducing
- heavily relies on external memory priority queue

## Sort Special Substrings

- recursion
- works well in external memory if rest works well

## Inducing

- keep buffer for each  $\alpha$ -interval of suffix array
- scan text and induce characters by writing them in buffer

## Jack of all Trades: DC3

- first direct linear time suffix array construction algorithm: DC3
- suffix tree construction algorithm with similar idea [Far97]
- Juha Kärkkäinen, Peter Sanders, and Stefan Burkhardt. “Linear work suffix array construction”. In: *J. ACM* 53.6 (2006), pages 918–936. DOI: [10.1145/1217856.1217858](https://doi.org/10.1145/1217856.1217858)
- based on [Difference Cover](#)

# Difference Cover

## Definition: Difference Cover

The set  $D \subseteq [0, \nu)$  is a **difference cover** modulo  $\nu$ , if

$$\{(i - j) \bmod \nu : i, j \in D\} = [0, \nu)$$

- $\{0, 1\}$  is difference cover modulo 3
- $\{0, 1, 3\}$  is difference cover modulo 7
- $\{0, 1, 3, 9\}$  is difference cover modulo 13

# Difference Cover

## Definition: Difference Cover

The set  $D \subseteq [0, \nu)$  is a **difference cover** modulo  $\nu$ , if

$$\{(i - j) \bmod \nu : i, j \in D\} = [0, \nu)$$

- $\{0, 1\}$  is difference cover modulo 3
- $\{0, 1, 3\}$  is difference cover modulo 7
- $\{0, 1, 3, 9\}$  is difference cover modulo 13

- $0 \equiv 0 - 0 \pmod{3}$
- $1 \equiv 1 - 0 \pmod{3}$
- $2 \equiv 0 - 1 \pmod{3}$

# Difference Cover

## Definition: Difference Cover

The set  $D \subseteq [0, \nu)$  is a **difference cover** modulo  $\nu$ , if

$$\{(i - j) \bmod \nu : i, j \in D\} = [0, \nu)$$

- $\{0, 1\}$  is difference cover modulo 3
- $\{0, 1, 3\}$  is difference cover modulo 7
- $\{0, 1, 3, 9\}$  is difference cover modulo 13

- $0 \equiv 0 - 0 \pmod{3}$
- $1 \equiv 1 - 0 \pmod{3}$
- $2 \equiv 0 - 1 \pmod{3}$

- $0 \equiv 0 - 0 \pmod{7}$
- $1 \equiv 1 - 0 \pmod{7}$
- $2 \equiv 3 - 1 \pmod{7}$
- $3 \equiv 3 - 0 \pmod{7}$
- $4 \equiv 0 - 3 \pmod{7}$
- $5 \equiv 1 - 3 \pmod{7}$
- $6 \equiv 0 - 1 \pmod{7}$

# Suffix Array Construction with DC3 (1/6)

## 1. Sample Suffixes

- for  $i \in \{0, 1, 2\}$  let be

$$B_i = \{i \in [0, n) : i \bmod 3 = k\}$$

- $C = B_0 \cdot B_1$

①  $\{0, 1\}$  is difference cover modulo 3

0	1	2	3	4	5	6	7	8	9	10	11
m	i	s	s	i	s	s	i	p	p	i	\$

# Suffix Array Construction with DC3 (1/6)

## 1. Sample Suffixes

- for  $i \in \{0, 1, 2\}$  let be

$$B_i = \{i \in [0, n) : i \bmod 3 = k\}$$

- $C = B_0 \cdot B_1$

①  $\{0, 1\}$  is difference cover modulo 3

0	1	2	3	4	5	6	7	8	9	10	11
m	i	s	s	i	s	s	i	p	p	i	\$

# Suffix Array Construction with DC3 (1/6)

## 1. Sample Suffixes

- for  $i \in \{0, 1, 2\}$  let be

$$B_i = \{i \in [0, n) : i \bmod 3 = k\}$$

- $C = B_0 \cdot B_1$

①  $\{0, 1\}$  is difference cover modulo 3



# Suffix Array Construction with DC3 (1/6)

## 1. Sample Suffixes

- for  $i \in \{0, 1, 2\}$  let be

$$B_i = \{i \in [0, n) : i \bmod 3 = k\}$$

- $C = B_0 \cdot B_1$

①  $\{0, 1\}$  is difference cover modulo 3



- $C = \{0, 3, 6, 9, 1, 4, 7, 10\}$

# Suffix Array Construction with DC3 (2/6)

## 2. Sort Sampled Suffixes

- for  $k = 0, 1$  let be

$$R_k = [T[k]T[k+1]T[k+2]][T[k+3]T[k+4]T[k+5]] \dots [T[\max B_k]T[\max B_k + 1]T[\max B_k + 2]]$$

- $R = R_0 \cdot R_1$
- sort  $R$  with Radix Sort in  $O(n)$  time
- all characters unique: ranks of sampled suffixes are known
- otherwise: recursively execute algorithm on  $R$

## Suffix Array Construction with DC3 (2/6)

### 2. Sort Sampled Suffixes

- for  $k = 0, 1$  let be

$$R_k = [T[k]T[k+1]T[k+2]][T[k+3]T[k+4]T[k+5]] \dots [T[\max B_k]T[\max B_k + 1]T[\max B_k + 2]]$$

- $R = R_0 \cdot R_1$
- sort  $R$  with Radix Sort in  $O(n)$  time
- all characters unique: ranks of sampled suffixes are known
- otherwise: recursively execute algorithm on  $R$

0	1	2	3	4	5	6	7
<i>[mis]</i>	<i>[sis]</i>	<i>[sip]</i>	<i>[pi\$]</i>	<i>[iss]</i>	<i>[iss]</i>	<i>[ipp]</i>	<i>[i\$\$]</i>
3	6	5	4	2	2	1	0

## Suffix Array Construction with DC3 (2/6)

### 2. Sort Sampled Suffixes

- for  $k = 0, 1$  let be

$$R_k = [T[k]T[k+1]T[k+2]][T[k+3]T[k+4]T[k+5]] \dots [T[\max B_k]T[\max B_k + 1]T[\max B_k + 2]]$$

- $R = R_0 \cdot R_1$
- sort  $R$  with Radix Sort in  $O(n)$  time
- all characters unique: ranks of sampled suffixes are known
- otherwise: recursively execute algorithm on  $R$

0	1	2	3	4	5	6	7
<i>[mis]</i>	<i>[sis]</i>	<i>[sip]</i>	<i>[pi\$]</i>	<i>[iss]</i>	<i>[iss]</i>	<i>[ipp]</i>	<i>[i\$\$]</i>
3	6	5	4	2	2	1	0

## Suffix Array Construction with DC3 (3/6)

Recursion: Step 1

0	1	2	3	4	5	6	7
3	6	5	4	2	2	1	0


## Suffix Array Construction with DC3 (3/6)

Recursion: Step 1

0	1	2	3	4	5	6	7
3	6	5	4	2	2	1	0


# Suffix Array Construction with DC3 (3/6)

## Recursion: Step 1

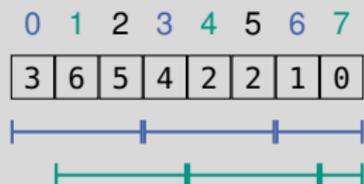

# Suffix Array Construction with DC3 (3/6)


## Recursion: Step 1

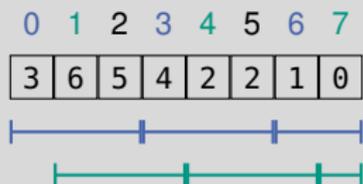

■  $C = \{0, 3, 6, 1, 4, 7\}$


# Suffix Array Construction with DC3 (3/6)

## Recursion: Step 1

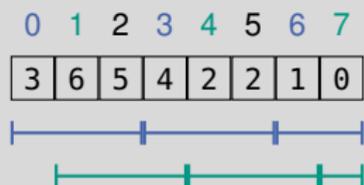

■  $C = \{0, 3, 6, 1, 4, 7\}$

## Recursion: Step 2

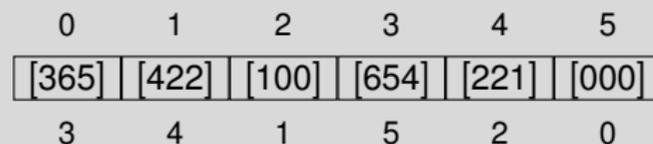

## Suffix Array Construction with DC3 (4/6)

### 3. Sort Non-Sampled Suffixes

- let  $i, j \in B_2$ , then

$$S_i \leq S_j \iff (T[i], \text{Rang}(S_{i+1})) \leq (T[j], \text{Rang}(S_{j+1}))$$

- ranks of next two suffixes is known
- sort tuples (in  $B_2$ ) using Radix Sort
- $O(n)$  time

# Suffix Array Construction with DC3 (4/6)

## 3. Sort Non-Sampled Suffixes

- let  $i, j \in B_2$ , then

$$S_i \leq S_j \iff (T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$$

- ranks of next two suffixes is known
- sort tuples (in  $B_2$ ) using Radix Sort
- $O(n)$  time

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

# Suffix Array Construction with DC3 (4/6)

## 3. Sort Non-Sampled Suffixes

- let  $i, j \in B_2$ , then

$$S_i \leq S_j \iff (T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$$

- ranks of next two suffixes is known
- sort tuples (in  $B_2$ ) using Radix Sort
- $O(n)$  time

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

# Suffix Array Construction with DC3 (4/6)

## 3. Sort Non-Sampled Suffixes

- let  $i, j \in B_2$ , then

$$S_i \leq S_j \iff (T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$$

- ranks of next two suffixes is known
- sort tuples (in  $B_2$ ) using Radix Sort
- $O(n)$  time

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

- $$\underbrace{(2, 1)}_{S_2} \leq \underbrace{(5, 4)}_{S_5}$$

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
$$S_i \leq S_j \iff (T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$$
  - if  $i \in B_1$ , then
$$S_i \leq S_j \iff (T[i], T[i+1], Rang(S_{i+2})) \leq (T[j], T[j+1], Rang(S_{j+2}))$$

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

■  $(\underbrace{2, 1}_{S_2}) \leq (\underbrace{5, 4}_{S_5})$

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

- $(\underbrace{2, 1}_{S_2}) \leq (\underbrace{5, 4}_{S_5})$

- $(0, 0, 0) \leq (2, 0, 0)$

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

- $\underbrace{(2, 1)}_{S_2} \leq \underbrace{(5, 4)}_{S_5}$

- $(0, 0, 0) \leq (2, 0, 0)$

- $(1, 0) \leq (2, 1)$

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

- $\underbrace{(2, 1)}_{S_2} \leq \underbrace{(5, 4)}_{S_5}$

- $(0, 0, 0) \leq (2, 0, 0)$
- $(1, 0) \leq (2, 1)$
- $(2, 1, 0) \leq (2, 2, 1)$
- ...

# Suffix Array Construction with DC3 (5/6)

## 4. Merge Suffixes

- let  $i \in C$  and  $j \in B_2$ , then
  - if  $i \in B_0$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], Rang(S_{i+1})) \leq (T[j], Rang(S_{j+1}))$
  - if  $i \in B_1$ , then
    - $S_i \leq S_j \iff$
    - $(T[i], T[i+1], Rang(S_{i+2})) \leq$
    - $(T[j], T[j+1], Rang(S_{j+2}))$

	0	1	2	3	4	5	6	7
	3	6	5	4	2	2	1	0
ranks	3	5	⊥	4	2	⊥	1	0

- $\underbrace{(2, 1)}_{S_2} \leq \underbrace{(5, 4)}_{S_5}$

- $(0, 0, 0) \leq (2, 0, 0)$
- $(1, 0) \leq (2, 1)$
- $(2, 1, 0) \leq (2, 2, 1)$
- ...
- ranks: 4 7 6 5 3 2 1 0

# Suffix Array Construction with DC3 (6/6)

## Finish Recursion

0	1	2	3	4	5	6	7
[ <i>mis</i> ]	[ <i>sis</i> ]	[ <i>sip</i> ]	[ <i>pi</i> \$]	[ <i>iss</i> ]	[ <i>iss</i> ]	[ <i>ipp</i> ]	[ <i>i</i> \$]\$
4	7	6	5	3	2	1	0

# Suffix Array Construction with DC3 (6/6)

## Finish Recursion

0	1	2	3	4	5	6	7
[ <i>mis</i> ]	[ <i>sis</i> ]	[ <i>sip</i> ]	[ <i>pi</i> \$]	[ <i>iss</i> ]	[ <i>iss</i> ]	[ <i>ipp</i> ]	[ <i>i</i> \$]
4	7	6	5	3	2	1	0

	0	1	2	3	4	5	6	7	8	9	10	11
	m	i	s	s	i	s	s	i	p	p	i	\$
ranks	4	3	⊥	7	2	⊥	6	1	⊥	5	0	⊥

# Suffix Array Construction with DC3 (6/6)

## Finish Recursion

0	1	2	3	4	5	6	7
[mis]	[sis]	[sip]	[pi\$]	[iss]	[iss]	[ipp]	[i\$\$]
4	7	6	5	3	2	1	0

	0	1	2	3	4	5	6	7	8	9	10	11
	m	i	s	s	i	s	s	i	p	p	i	\$
ranks	4	3	⊥	7	2	⊥	6	1	⊥	5	0	⊥

■ rest can be used as exercise ⓘ solution: 11 10 7 4 1 0 9 8 6 3 5 2

## DC3: Running Times

- everything but recursion obviously in  $O(n)$  time
- only sorting tuples of size  $\leq 3$
- Radix Sort in  $O(n)$  time

## DC3: Running Times

- everything but recursion obviously in  $O(n)$  time
  - only sorting tuples of size  $\leq 3$
  - Radix Sort in  $O(n)$  time
- 
- recursion on texts of size  $\lceil 2n/3 \rceil$
  - $T(n) = T(2n/3) + O(n) = O(n)$

## DC3: Running Times

- everything but recursion obviously in  $O(n)$  time
- only sorting tuples of size  $\leq 3$
- Radix Sort in  $O(n)$  time

- recursion on texts of size  $\lceil 2n/3 \rceil$
- $T(n) = T(2n/3) + O(n) = O(n)$

### Generalization

- works with every difference cover
- sorting somewhat more complicated
- running time:  $O(\nu n)$

## DC3: Running Times

- everything but recursion obviously in  $O(n)$  time
- only sorting tuples of size  $\leq 3$
- Radix Sort in  $O(n)$  time

- recursion on texts of size  $\lceil 2n/3 \rceil$
- $T(n) = T(2n/3) + O(n) = O(n)$



### Generalization

- works with every difference cover
- sorting somewhat more complicated
- running time:  $O(\nu n)$

### In Other Models of Computation

- external memory:  $O(\frac{n}{DB} \lg_{\frac{M}{B}} \frac{n}{B})$  ⓘ using  $D$  disks
- BSP:  $O(\frac{n \lg n}{P} + L \lg^2 P + g \frac{n \lg n}{P \lg(n/P)})$  ⓘ using  $P$  PEs
- EREW-PRAM:  $O(\lg^2 n)$  time and  $O(n \lg n)$  work

# Prefix Doubling: Experimental Results [Kur20]

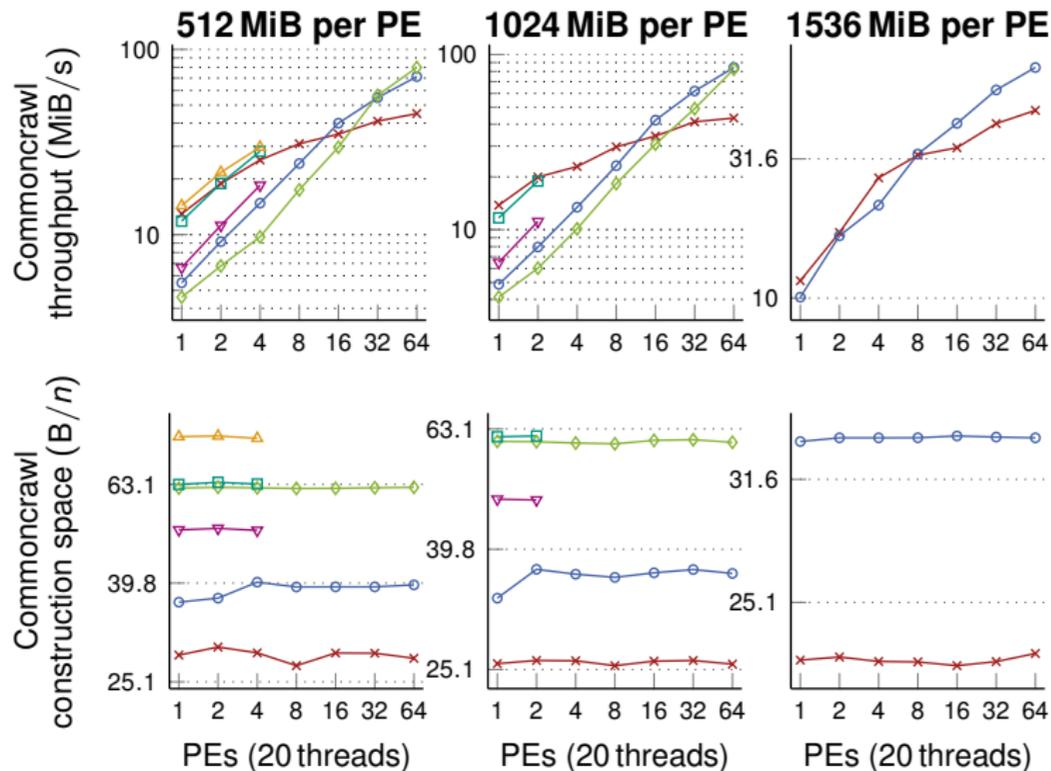


# Conclusion and Outlook

## This Lecture

- distributed and external memory suffix sorting
- more suffix sorting techniques

## Linear Time Construction

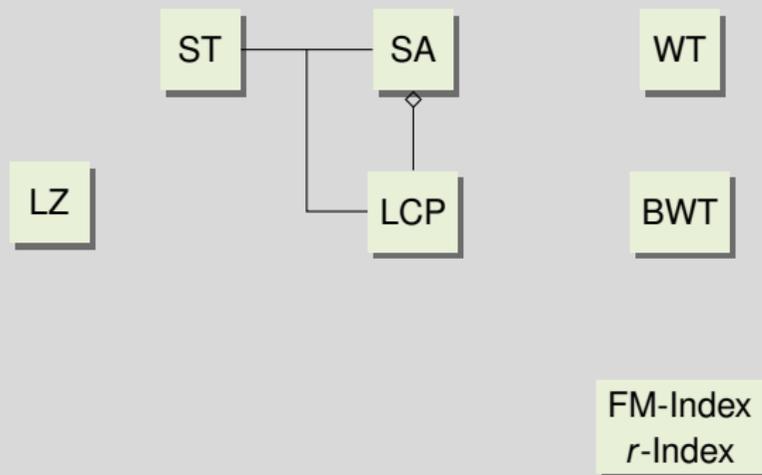

# Conclusion and Outlook


## This Lecture

- distributed and external memory suffix sorting
- more suffix sorting techniques

## Next Lecture

- inverted indices

## Linear Time Construction

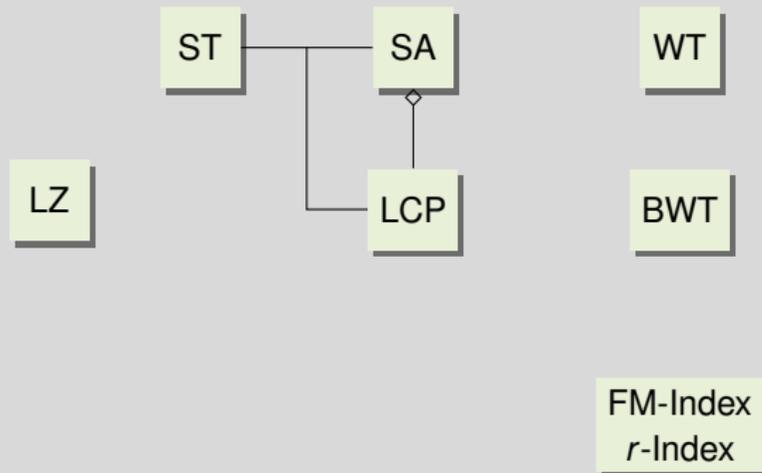

# Bibliography I

- [Bah+19] Johannes Bahne, Nico Bertram, Marvin Böcker, Jonas Bode, Johannes Fischer, Hermann Foot, Florian Grieskamp, Florian Kurpicz, Marvin Löbel, Oliver Magiera, Rosa Pink, David Piper, and Christopher Poeplau. “SACABench: Benchmarking Suffix Array Construction”. In: *SPIRE*. Volume 11811. Lecture Notes in Computer Science. Springer, 2019, pages 407–416. DOI: [10.1007/978-3-030-32686-9\\_29](https://doi.org/10.1007/978-3-030-32686-9_29).
- [BFO16] Timo Bingmann, Johannes Fischer, and Vitaly Osipov. “Inducing Suffix and LCP Arrays in External Memory”. In: *ACM J. Exp. Algorithmics* 21.1 (2016), 2.3:1–2.3:27. DOI: [10.1145/2975593](https://doi.org/10.1145/2975593).
- [Bin18] Timo Bingmann. “Scalable String and Suffix Sorting: Algorithms, Techniques, and Tools”. PhD thesis. Karlsruhe Institute of Technology, Germany, 2018. DOI: [10.5445/IR/1000085031](https://doi.org/10.5445/IR/1000085031).
- [Dem+08] Roman Dementiev, Juha Kärkkäinen, Jens Mehnert, and Peter Sanders. “Better External Memory Suffix Array Construction”. In: *ACM J. Exp. Algorithmics* 12 (2008), 3.4:1–3.4:24. DOI: [10.1145/1227161.1402296](https://doi.org/10.1145/1227161.1402296).

## Bibliography II

- [FA15] Patrick Flick and Srinivas Aluru. “Parallel Distributed Memory Construction of Suffix and Longest Common Prefix Arrays”. In: *SC*. ACM, 2015, 16:1–16:10. DOI: [10.1145/2807591.2807609](https://doi.org/10.1145/2807591.2807609).
- [Far97] Martin Farach. “Optimal Suffix Tree Construction with Large Alphabets”. In: *FOCS*. IEEE Computer Society, 1997, pages 137–143. DOI: [10.1109/SFCS.1997.646102](https://doi.org/10.1109/SFCS.1997.646102).
- [FK19] Johannes Fischer and Florian Kurpicz. “Lightweight Distributed Suffix Array Construction”. In: *ALENEX*. SIAM, 2019, pages 27–38. DOI: [10.1137/1.9781611975499.3](https://doi.org/10.1137/1.9781611975499.3).
- [GBS92] Gaston H. Gonnet, Ricardo A. Baeza-Yates, and Tim Snider. “New Indices for Text: Pat Trees and Pat Arrays”. In: *Information Retrieval: Data Structures & Algorithms*. Prentice-Hall, 1992, pages 66–82.
- [Kär+17] Juha Kärkkäinen, Dominik Kempa, Simon J. Puglisi, and Bella Zhukova. “Engineering External Memory Induced Suffix Sorting”. In: *ALENEX*. SIAM, 2017, pages 98–108. DOI: [10.1137/1.9781611974768.8](https://doi.org/10.1137/1.9781611974768.8).

## Bibliography III

- [KSB06] Juha Kärkkäinen, Peter Sanders, and Stefan Burkhardt. “Linear work suffix array construction”. In: *J. ACM* 53.6 (2006), pages 918–936. DOI: [10.1145/1217856.1217858](https://doi.org/10.1145/1217856.1217858).
- [Kur20] Florian Kurpicz. “Parallel Text Index Construction”. PhD thesis. Technical University of Dortmund, Germany, 2020. DOI: [10.17877/DE290R-21114](https://doi.org/10.17877/DE290R-21114).
- [LS07] N. Jesper Larsson and Kunihiko Sadakane. “Faster Suffix Sorting”. In: *Theor. Comput. Sci.* 387.3 (2007), pages 258–272. DOI: [10.1016/j.tcs.2007.07.017](https://doi.org/10.1016/j.tcs.2007.07.017).
- [MM93] Udi Manber and Eugene W. Myers. “Suffix Arrays: A New Method for On-Line String Searches”. In: *SIAM J. Comput.* 22.5 (1993), pages 935–948. DOI: [10.1137/0222058](https://doi.org/10.1137/0222058).
- [NZC11] Ge Nong, Sen Zhang, and Wai Hong Chan. “Two Efficient Algorithms for Linear Time Suffix Array Construction”. In: *IEEE Trans. Computers* 60.10 (2011), pages 1471–1484. DOI: [10.1109/TC.2010.188](https://doi.org/10.1109/TC.2010.188).
- [PST07] Simon J. Puglisi, William F. Smyth, and Andrew Turpin. “A Taxonomy of Suffix Array Construction Algorithms”. In: *ACM Comput. Surv.* 39.2 (2007), page 4. DOI: [10.1145/1242471.1242472](https://doi.org/10.1145/1242471.1242472).

## Bibliography IV

- [Val90] Leslie G. Valiant. “A Bridging Model for Parallel Computation”. In: *Commun. ACM* 33.8 (1990), pages 103–111. DOI: [10.1145/79173.79181](https://doi.org/10.1145/79173.79181).